

MODEL PTRM

- ✓ $\pm 1\%$ FS static accuracy ($\pm 0.5\%$ FS possible as an option)
- ✓ Rugged, all-welded 316 stainless steel wetted parts (No O-ring)
- ✓ Reliable (lifetime in millions of cycles), high-performance transducers
- ✓ Low cost pressure transducers
- ✓ Calibrated & temperature compensated
- ✓ Ranges from 60 to 300 psi



Description

Senzors' model PTRM is a compact rugged pressure transducer. It is designed for the OEM customer using medium to high volumes and needing a small, low cost pressure transducer for industrial applications. With its excellent stability and proven reliability the PTRM provides high performance and is designed for any application that requires a low to medium pressure measurement. These low cost pressure transmitters are available with several package options, thanks to their flexible design.

The sensing element is a solid-state piezoresistive silicon die. This technology is based on a principle that results in excellent linearity, increased long-term stability and reliability and virtually no hysteresis. The silicon strain gage is fitted into a 316 stainless steel package and is completely isolated from the media. There are no internal O-rings or elastomers to contain the media and to contribute to instabilities or drifts.


The sensor signal is amplified by a signal conditioning module that integrates an advanced electronic amplifier and a built-in voltage regulator providing a high-level output from an unregulated voltage supply. Each unit is calibrated and pressure and temperature compensated in our facilities. The PTRM is thus field-interchangeable.

Providing excellent media compatibility with all 316 stainless steel wetted parts, it is perfectly suited for use with most corrosive fluids. The PTRM also has a IP65 weatherproof stainless steel case allowing outdoor installations. This model will satisfy the most demanding OEM applications.



Applications

Pressure measuring systems
 Smart valves
 Pump Control
 Compressor Control
 Pneumatic & Hydraulic Systems
 Industrial Controls
 Hydraulic Presses
 Construction & Agriculture Equipment
 Transportation & Off-Road
 Train Brake Systems / Railroad Brake Systems
 Lift Trucks
 Machine Tools

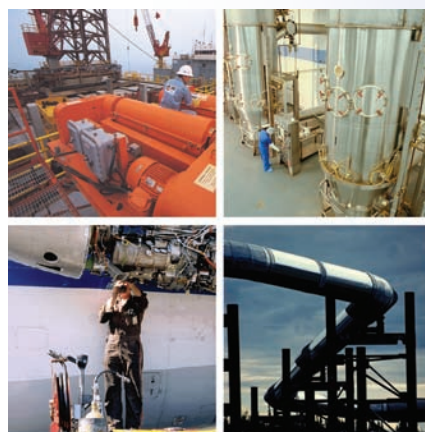

Model PTRM


SEN²ORS

www.sensors.com

Industrial Pressure Transducers

Dimensions

Dimensions below are in inches and (mm).
Tolerance on diameter: -0.000"/-0.0020"
(-0.00mm/-0.05mm)

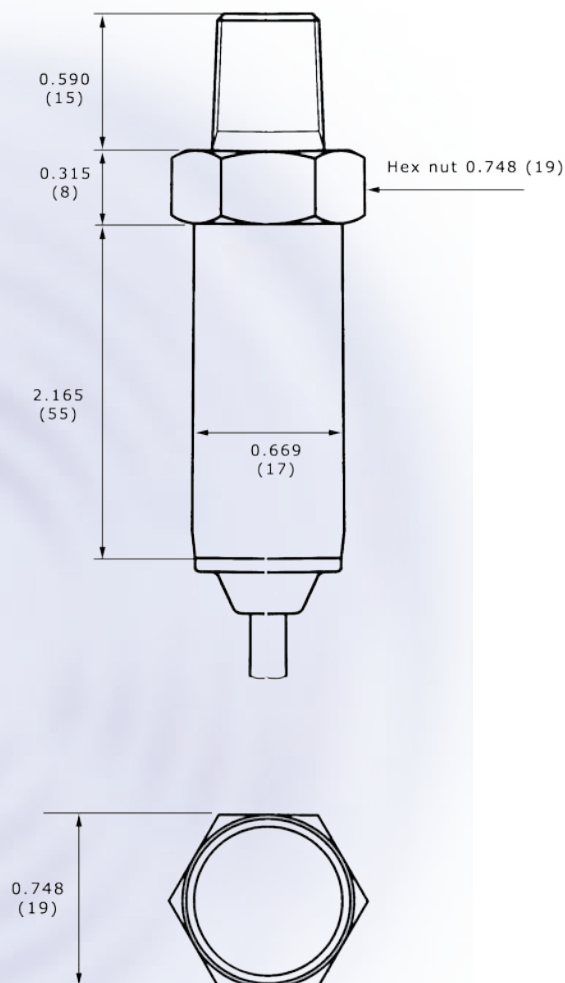

Specifications

Pressure Ranges	0-60 psi through 0-300 psi
Type of pressure	Absolute, Sealed, Vented

Performances

Static Accuracy (linearity, hysteresis, repeatability and calibration)	± 1%FS (B.F.S.L.) ± 0.5%FS (B.F.S.L.) optional
Temperature error	± 0.05%FS/°F
Long term stability	± 0.3%FS per annum
Response time (-3dB)	< 1 ms
Resolution	infinite (0.02%FS practical minimum)
Fatigue life	> 10 million cycles

Environmental characteristics

Operating temperature (process)	-30°C to +85°C
Ambient temperature	-30°C to +85°C
Random vibration (50-2000Hz)	2G
Shock	5G, 11 ms, half-sine
Drop (any axis)	1.5 m

Electrical characteristics

Supply	8 to 28 VDC	8 to 28 VDC	13 to 28 VDC	8 to 28 VDC
Output	0 to 1 VDC	0 to 5 VDC	0 to 10 VDC	4 to 20 mA
Load	> 5 kΩ	> 5 kΩ	> 5 kΩ	< 1 kΩ
Current draw	< 4 mA	< 4 mA	< 4 mA	< 25 mA
Insulation	> 100 MΩ at 50 VDC			

Physical characteristics

Proof pressure	1.5x
Burst pressure (pressure containment)	750 psi for vented-type transducers 2,000 psi for absolute and sealed
Wetted parts	316L Stainless Steel
Weight	≈ 2.8oz (80g)

Wiring diagram

	Cable	Binder	Micro-DIN
3-wire, voltage output	Brown +Supply White +OUT Green GND	pin 1 GND pin 2 +OUT pin 3 +Supply	pin 1 GND pin 2 +OUT pin 3 +Supply
2-wire, 4-20 mA output	Brown +Supply White +OUT/GND	pin 1 +OUT/GND pin 3 +Supply	pin 1 +OUT/GND pin 3 +Supply

Ordering information

	PTRM	-	S	Q10	05	-	42	9C	-	N4	M3	S	X	K	-	0000
Pressure reference	A	Absolute	C	Compound												
	S	Sealed														
	V	Vented														
Pressure range																
Request code to use for your pressure range																
Compensated temperature range	05	0 to +50°C														
	A8	-10 to +80°C														
Request code to use for any other compensated temperature range																
Output signal	42	4 to 20 mA	01	0 to 1 VDC												
	10	0 to 10 VDC	05	0 to 5 VDC												
Request code to use for any other output signal																
Static accuracy	9C	1%FS														
	5B	0.5%FS														
Pressure fitting	N4	1/4"-18NPT														
	G4	1/4" BSP (G 1/4")														
Request code to use for any other pressure fitting																
Electrical connection	M3	Micro-DIN connector	CC	Cable												
	BI	Binder connector														
Request code to use for any other electrical termination																
Wetted material	S	316L Stainless Steel														
O-ring material	V	Fluorocarbon	S	Silicone												
	E	EPDM	X	No O-ring (metal seal threads)												
	K	Kalrez®														
Oil filling	K	Silicone oil														
Option	0000	Standard														

Important Notice: Due to continuing development and improvement, Senzors reserves the right to make changes to or discontinue any product or service identified in this publication without prior notice. Senzors assumes no responsibility for infringement of patents or rights of others based on Senzors applications assistance or product specifications since Senzors does not possess full access concerning the use or application of customers' products. While Senzors provides applications assistance, it is up to the customer to determine the suitability of the product or service for the application. Senzors does not assume any liability arising out of the application or use of any of its products. All sales are subject to our standard sales terms and conditions.

Senzors, Inc.
3500 South Dupont Highway
Dover, DE 19901
Toll free: 1-866-SENZORS (736-9677)
email: sales@senzors.com
www.senzors.com